


Tolerance for Cutting parts(mm)						Tolerance for forging parts(mm)					Tolerance for injection parts(mm)					
Size Range	0—6	>6—30	>30—100	>100—300	>300—1000	Size Range	0—30	>30—100	>100—300	>300	Size Range	0—10	10—50	>50—200	>200—500	>500
Tolerance	±0.05	±0.1	±0.2	±0.3	±0.5	Tolerance	±0.5	±1.0	±2.0	±3.0	Tolerance	±0.3	±0.5	±1.0	±2.0	±3.0
Note,All critical dimensions are marked with "※"																

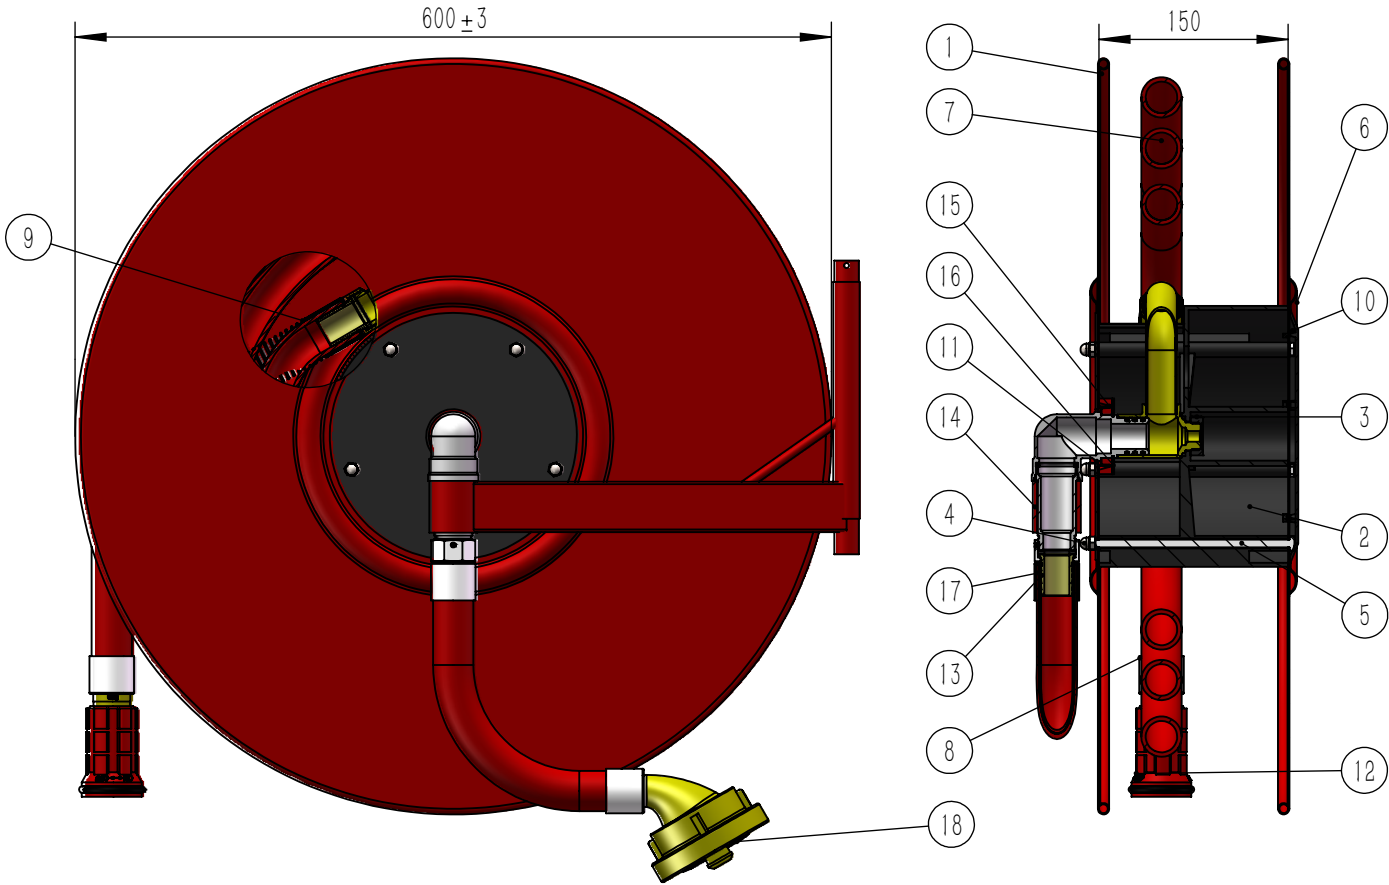

18	Bend copper joint, 1-2	1924-004-04HP	1
17	Connector assembly, M30xG1", 25x1M	2530-031	1
16	Clamp spring, 60x31.8x1.5	2530-009A	2
15	Retaine, 60x34.4x10.5	2530-008A	1
14	L-Swing Arm, 16x240x295x31	2530S-013	1
13	Waterway, MS-G, 25x25		1
12	Nozzle, N-09-2	N-09-2	1
11	Flat plate nameplate, 196x1.8x8.5x43		1
10	Nameplate, 205x7x5	2530-004	1
9	Spring, 32.8x1.5x120	2530-025-120	1
8	Coupling, 33x1.2x30	2530-017	2
7	Fire hose, 25x30M	2530-015	1
6	Right Disc(Flat), 07, 600	2530-001D-600	1
5	Screw rod, M6x160		5
4	Spherical nut, M6		5
3	Hex nut, M22x10	2530-021	1
2	Drum, 207x150x5	2530-003-150	1
1	Left Disc(Flat), 07, 600	2530-002D-600	1
No.	Name	Drawing No.	Qty.

△						Name	Fire Hose Reel, 600			Approve	C. Pollet
△											
△						Material		Surface Colour		Design	2024.01.18
△											
△						Drawing No.		Unit	mm	Draw	2024.01.18
△								Proportion	1:6		
△							crico™			Revision	A
NO.	Original Size	Modified	Revisor	Auditor	Date						